








Dimensions

ECO 2820C-V2


28.2(2808ECO)
34.2(2814ECO)
40.2(2820ECO)
46.2(2826ECO)



38.2(2808ECO)
44.2(2814ECO)
50.2(2820ECO)
56.2(2826ECO)

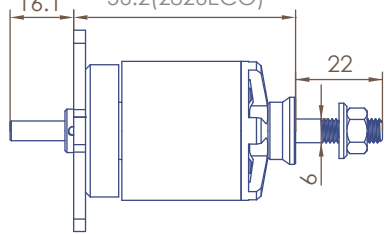

Specification




ECO-C Series	ECO 2820C		
SKU(商品编码)	51663	51664	51665
KV(KV值)	1120	940	800
Turns(匝数)	4.5	5.5	6.5
Weight(g)(重量)	138	138	138
Dimensions(D x L)[mm](尺寸)	35.2x40.2	35.2x40.2	35.2x40.2
Slots & Poles(槽数, 极数)	12N14P	12N14P	12N14P
Ri(mOhm)(电阻)	25.0	34.5	46.0
I _o @10V (A)(空载电流)	1.8	1.2	0.9
No.of Cells(LiPo)(适用电池)	2.3	3.4	3.4
Max. EfficiencyCurrent[A](效率电流)	28	26	22
Max. Burst Current (15S)[A](最大电流)	45	40	34
Max. Power(15S)[W](最大功率)	540	480	540
Max. Torque [N*M](最大扭矩)	0.46	0.49	0.48
Shaft diameter(mm)(轴径)	5	5	5
Mountingholes pitch(安装孔距)	19/19	19/19	19/19
Input Connectors(输入链接)	GC3.5	GC3.5	GC3.5
RecommendedESC(调速器)	XC-45-LITE or XC4018BA	XC-45-LITE or XC4018BA	XC-45-LITE or XC4018BA
Propeller(螺旋桨)	3S: 12x5E, 11x7E, 10x6E	3S: 12x6E, 13x6.5E 4S: 10x5E, 9x5E	3S: 12x8E, 14x7E 4S: 12x4E, 11x7E
Class(适用机种)		.21-.30 Class	

ECO 2820C (1120KV)

11.1V Motor @ Optimum Efficiency 最佳效率点



Motor Characteristics

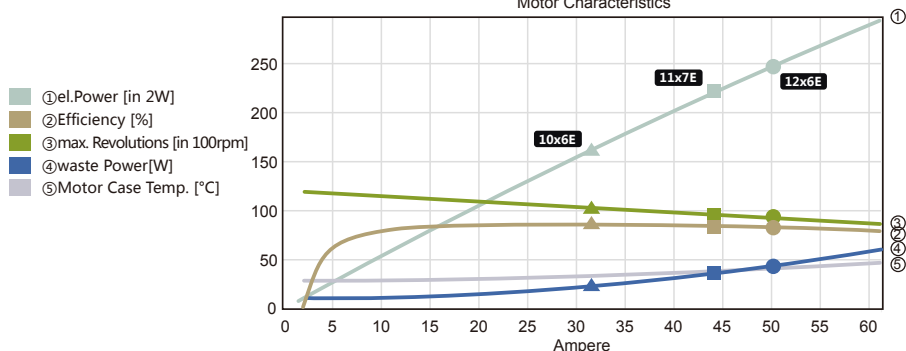

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Voltage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
11.1V (3S LIPO)	10x6E							
	4200	37	2.3	11.1	25	76.8	285	11.4
	4900	43	3.5	11	38	80.4	388	10.2
	5600	50	5	11	55.1	82.7	506	9.2
	6300	56	7.1	11	77.1	84.3	641	8.3
	7000	63	9.6	10.9	104.5	85.3	791	7.6
	7700	71	12.8	10.8	138	85.9	957	6.9
	8400	78	16.7	10.7	178.3	86.3	1139	6.4
	9100	86	21.4	10.7	226.2	86.5	1337	5.9
	9800	94	27	10.5	282.3	86.6	1550	5.5
	10277	100	31.6	10.4	327.4	86.2	1705	5.2
	11x7E							
	3500	31	2.2	11.1	24.3	78.3	307	12.6
	4200	38	3.7	11	40.3	81.6	442	11
	4900	45	5.7	11	62.5	83.5	602	9.6
	5600	52	8.5	10.9	92.2	84.6	786	8.5
	6300	59	12.1	10.8	130.5	85	995	7.6
	7000	67	16.8	10.7	178.7	85.2	1228	6.9
	7700	75	22.6	10.6	238.1	85.1	1486	6.2
	8400	84	29.9	10.5	310	84.8	1769	5.7
	9100	94	38.9	10.3	395.8	84.5	2076	5.2
	9502	100	45.3	10.1	455.2	83.9	2263	5
	12x6E							
	3500	32	2.6	11	28.9	79.8	342	11.8
	4200	38	4.4	11	48.4	82.4	492	10.2
	4900	45	7	11	75.6	83.8	670	8.9
	5600	53	10.4	10.9	112.1	84.3	875	7.8
	6300	61	14.9	10.8	159.4	84.5	1107	6.9
	7000	69	20.7	10.7	219.1	84.3	1367	6.2
	7700	78	28.1	10.5	292.9	83.9	1654	5.6
	8400	88	37.5	10.3	382.5	83.5	1968	5.1
	9100	99	49.2	10.1	489.5	82.9	2310	4.7
	9177	100	51.1	10	506.2	82.5	2349	4.6


ECO 2820C (940KV)

11.1V Motor @ Optimum Efficiency 最佳效率点



- ① el.Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

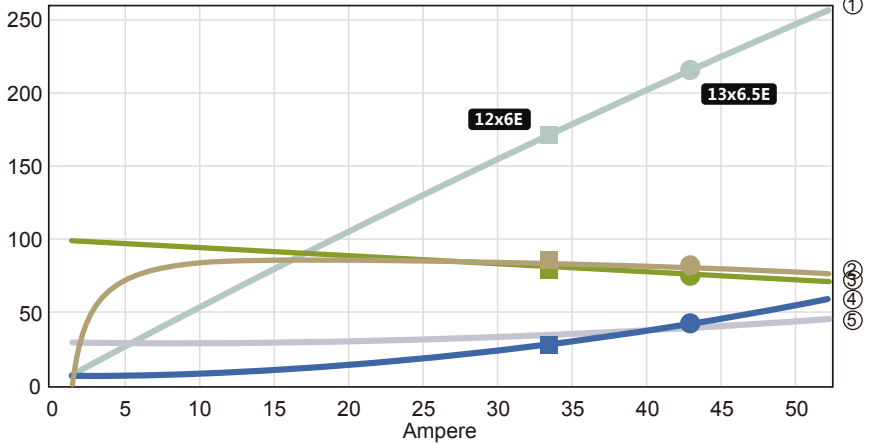

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Voltage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)	
12x6E									
11.1V (3S LIPO)	3000	32	1.7	11.1	18.4	78.8	251	13.6	
	3600	39	2.8	11	30.6	82.1	362	11.8	
	4200	45	4.3	11	47.6	83.9	492	10.3	
	4800	53	6.4	11	70.2	84.8	643	9.2	
	5400	60	9.2	10.9	99.4	85.3	813	8.2	
	6000	68	12.6	10.8	136.3	85.4	1004	7.4	
	6600	76	17	10.7	181.6	85.3	1215	6.7	
	7200	85	22.4	10.6	236.6	85	1446	6.1	
	7800	94	29	10.5	302.1	84.6	1697	5.6	
	8172	100	34	10.4	350.5	84	1863	5.3	
	13x6.5E								
	3000	33	2.4	11	26.7	81.3	346	13	
	3500	39	3.8	11	41.6	82.8	471	11.3	
	4000	45	5.6	11	61.5	83.6	615	10	
4500	51	8	10.9	87.4	83.8	778	8.9		
5000	58	11.1	10.9	120	83.7	961	8		
5500	65	15	10.8	160.3	83.4	1162	7.3		
6000	72	19.7	10.7	209.3	83	1383	6.6		
6500	80	25.6	10.6	267.8	82.4	1623	6.1		
7000	89	32.6	10.4	336.9	81.8	1883	5.6		
7500	98	41.2	10.2	417.7	81.2	2161	5.2		
7615	100	43.7	10.2	440.7	80.8	2228	5.1		

14.8V Motor @ Optimum Efficiency 最佳效率点

Current
23.49
A

Voltage
14.09
V

Revolutions*
11998
rpm


electric Power
331
W

mech. Power
289
W

Efficiency
87.3
%

- ① el. Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]


Motor Characteristics

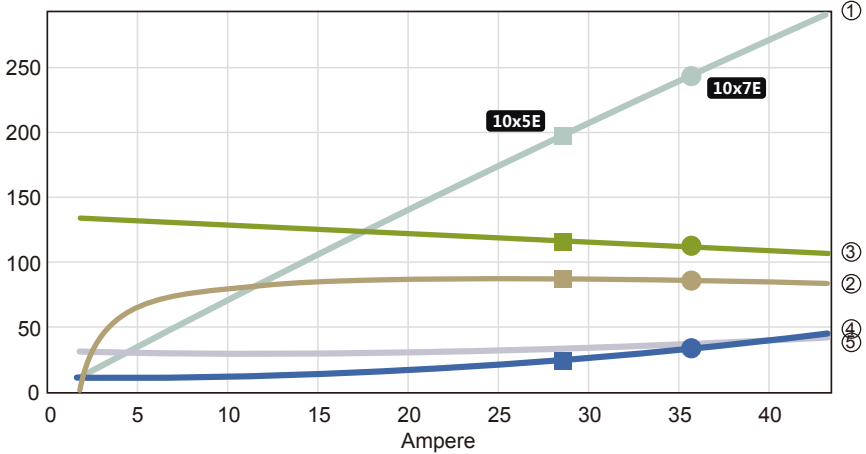

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
14.8V (4S LIPO)	10x5E							
	3200	25	0.7	14.8	10.4	68	138	13.2
	4000	31	1.2	14.8	18.4	75.5	215	11.7
	4800	37	2	14.7	29.9	80.1	310	10.4
	5600	44	3.1	14.7	45.8	83	422	9.2
	6400	50	4.6	14.7	66.9	84.9	551	8.2
	7200	57	6.4	14.6	93.9	86.1	697	7.4
	8000	64	8.8	14.6	127.7	86.8	861	6.7
	8800	71	11.7	14.5	169.1	87.2	1042	6.2
	9600	79	15.3	14.4	218.9	87.5	1240	5.7
	10400	87	19.6	14.3	278.1	87.6	1455	5.2
	11200	95	24.7	14.1	347.4	87.5	1688	4.9
	11681	100	28.5	14	396.7	87.1	1836	4.6
	10x7E							
	3200	25	0.9	14.8	13.5	73.7	193	14.3
	4000	31	1.7	14.8	24.4	79.6	301	12.4
	4800	38	2.7	14.7	40.4	83	434	10.8
	5600	45	4.3	14.7	62.6	85	591	9.4
	6400	52	6.3	14.6	92.2	86.1	771	8.4
	7200	59	9	14.5	130.4	86.7	976	7.5
	8000	66	12.4	14.5	178.4	87	1205	6.8
	8800	74	16.6	14.3	237.3	87	1459	6.1
9600	82	21.9	14.2	308.5	86.9	1736	5.6	
10400	91	28.2	14	393.2	86.7	2037	5.2	
11192	100	36.1	13.8	495.4	86	2359	4.8	


ECO 2820C (800KV)

11.1V Motor @ Optimum Efficiency 最佳效率点



- ① el.Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

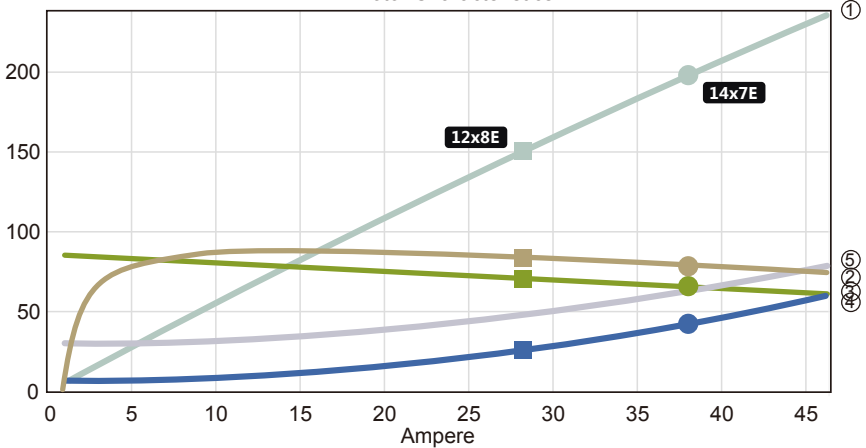

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
11.1V (3S LIPO)	12x8E							
	2500	31	1.3	11.1	14.3	78.3	232	16.2
	3000	38	2.2	11.1	23.8	81.6	335	14.1
	3500	45	3.4	11	36.9	83.4	456	12.3
	4000	52	5	11	54.5	84.3	595	10.9
	4500	59	7.1	11	77.2	84.7	753	9.8
	5000	66	9.7	10.9	105.8	84.8	930	8.8
	5500	74	13	10.9	141.1	84.7	1125	8
	6000	82	17.1	10.8	183.9	84.3	1339	7.3
	6500	90	22	10.7	235	83.9	1572	6.7
	7000	99	27.9	10.6	295.2	83.4	1823	6.2
	7032	100	28.5	10.6	300.8	83.2	1839	6.1
	14x7E							
	2800	37	2.8	11.1	31.2	81.9	405	13
	3200	42	4.2	11	46.2	82.5	529	11.5
	3600	48	6	11	65.7	82.7	670	10.2
	4000	55	8.3	11	90.3	82.5	827	9.2
	4400	61	11.1	10.9	120.7	82.2	1001	8.3
	4800	68	14.6	10.9	157.7	81.6	1191	7.6
	5200	75	18.9	10.8	202	81	1398	6.9
5600	82	23.9	10.7	254.4	80.4	1621	6.4	
6000	90	30	10.6	315.7	79.6	1861	5.9	
6400	98	37.2	10.5	386.7	78.9	2117	5.5	
6465	100	38.7	10.5	401.2	78.6	2160	5.4	

14.8V Motor @ Optimum Efficiency 最佳效率点

Current
17.63
A

Voltage
14.37
V

Revolutions*
10430
rpm


electric Power
253.4
W

mech. Power
221.8
W

Efficiency
87.5
%

- ① el. Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

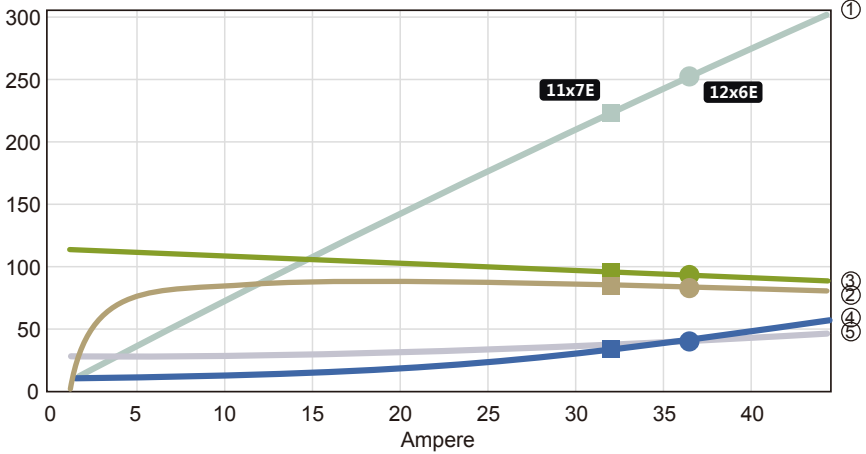






Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Voltage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
14.8V (4S LIPO)	11x7E							
	2800	26	0.9	14.8	12.8	76	197	15.3
	3500	32	1.6	14.8	23.5	81.1	307	13.1
	4200	39	2.7	14.7	39.2	83.9	442	11.3
	4900	46	4.2	14.7	61.1	85.4	602	9.8
	5600	54	6.2	14.7	90.4	86.1	786	8.7
	6300	61	8.8	14.6	128.3	86.4	995	7.8
	7000	69	12.2	14.5	176.1	86.4	1228	7
	7700	77	16.3	14.4	234.8	86.3	1486	6.3
	8400	85	21.5	14.3	306	85.9	1769	5.8
	9100	94	27.7	14.2	390.9	85.5	2076	5.3
	9541	100	32.5	14.1	455.1	84.9	2282	5
	12x6E							
	2800	26	1	14.8	15.1	78.2	219	14.5
	3500	33	1.9	14.8	28	82.4	342	12.2
	4200	40	3.2	14.7	47.2	84.5	492	10.4
	4900	47	5.1	14.7	74.1	85.5	670	9
	5600	55	7.6	14.6	110.2	85.8	875	7.9
	6300	62	10.8	14.6	156.9	85.8	1107	7.1
	7000	70	15	14.5	216	85.5	1367	6.3
7700	79	20.2	14.4	288.9	85.1	1654	5.7	
8400	88	26.7	14.2	377.4	84.6	1968	5.2	
9100	97	34.6	14	483.1	84	2310	4.8	
9268	100	37	14	514.9	83.5	2396	4.7	



Dimensions


ECO 2826C-V2

28.2(2808ECO)
34.2(2814ECO)
40.2(2820ECO)
46.2(2826ECO)

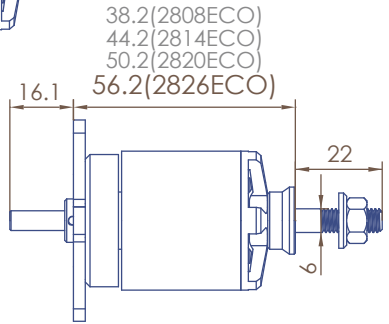

38.2(2808ECO)
44.2(2814ECO)
50.2(2820ECO)
56.2(2826ECO)


Specification



ECO-C Series	ECO 2826C		
SKU(商品编码)	51666	51667	51668
KV(KV值)	1120	850	720
Turns(匝数)	3.5	4.5	5.5
Weight(g)(重量)	167	167	167
Dimensions(D x L)[mm](尺寸)	35.2x46.2	35.2x46.2	35.2x46.2
Slots & Poles(槽数, 极数)	12N14P	12N14P	12N14P
Ri(mOhm)(电阻)	19.3	26.9	43.3
I _o @10V (A)(空载电流)	2.4	1.7	1.1
No.of Cells(LiPo)(适用电池)	2.3	3.4	4.5
Max. EfficiencyCurrent[A](效率电流)	35	30	25
Max. Burst Current (15S)[A](最大电流)	55	45	38
Max. Power(15S)[W](最大功率)	660	720	750
Max. Torque [N*M](最大扭矩)	0.56	0.61	0.60
Shaft diameter(mm)(轴径)	5	5	5
Mountingholes pitch(安装孔距)	19/19	19/19	19/19
Input Connectors(输入链接)	GC3.5	GC3.5	GC3.5
RecommendedESC(调速器)	XC-65-LITE or XC6018BA	XC-65-LITE or XC6018BA	XC-65-LITE or XC6018BA
Propeller(螺旋桨)	3S: 12x6E, 13x6.5E	3S: 15x8E, 14x7E 4S: 13x6.5E, 12x7E	4S: 14x7E, 13x6.5E 5S: 12x5E, 11x7E
Class(适用机种)	.25-.32 (30E)Class e.g. Extreme Flight 48* airplanes		


ECO 2826C (1120KV)

11.1V Motor @ Optimum Efficiency 最佳效率点



- ① el.Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]


Motor Characteristics

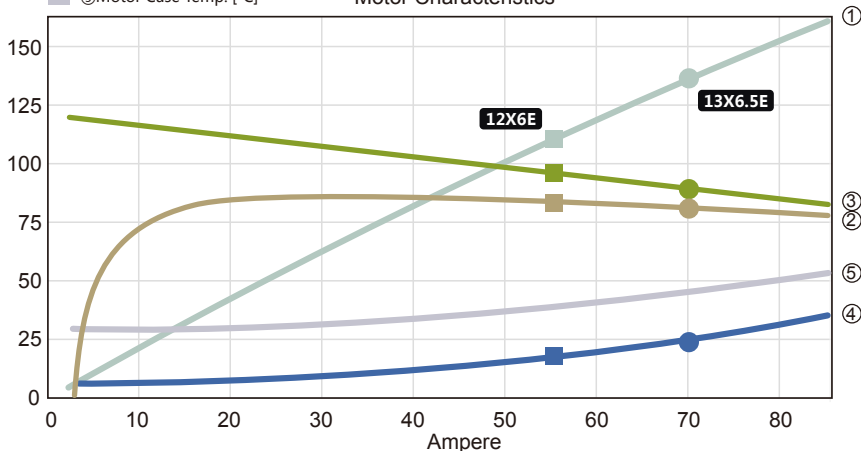

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
11.1V (3S LIPO)	12X6E							
	2800	25	1.5	11.1	16.7	70.8	219	13.1
	3500	31	2.7	11.1	29.9	77.2	342	11.4
	4200	38	4.5	11	49.3	80.9	492	10
	4900	45	7	11	76.3	83.1	670	8.8
	5600	52	10.3	10.9	112.2	84.3	875	7.8
	6300	59	14.7	10.9	158.6	84.9	1107	7
	7000	67	20.3	10.8	216.8	85.2	1367	6.3
	7700	75	27.4	10.6	288.6	85.2	1654	5.7
	8400	84	36.1	10.5	375.3	85.1	1968	5.2
	9100	93	46.9	10.3	478.7	84.8	2310	4.8
	9572	100	56	10.2	562.7	84.2	2556	4.5
	13X6.5E							
	2400	21	1.4	11.1	15.5	71.6	221	14.3
	3000	27	2.6	11.1	28	77.5	346	12.3
	3600	33	4.2	11	46.5	80.7	498	10.7
	4200	39	6.6	11	72.2	82.5	678	9.4
	4800	45	9.8	10.9	106.6	83.4	885	8.3
	5400	52	14.1	10.9	151.2	83.7	1120	7.4
	6000	59	19.5	10.8	207.3	83.7	1383	6.7
6600	66	26.3	10.7	276.7	83.5	1674	6	
7200	74	34.7	10.5	360.8	83.1	1992	5.5	
7800	82	45.2	10.4	461.3	82.7	2338	5.1	
8400	92	58.1	10.1	580	82.1	2711	4.7	
8889	100	71.3	9.9	696.7	81.3	3036	4.4	


ECO 2826C (850KV)

11.1V Motor @ Optimum Efficiency 最佳效率点



- ① el. Power [in 2W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

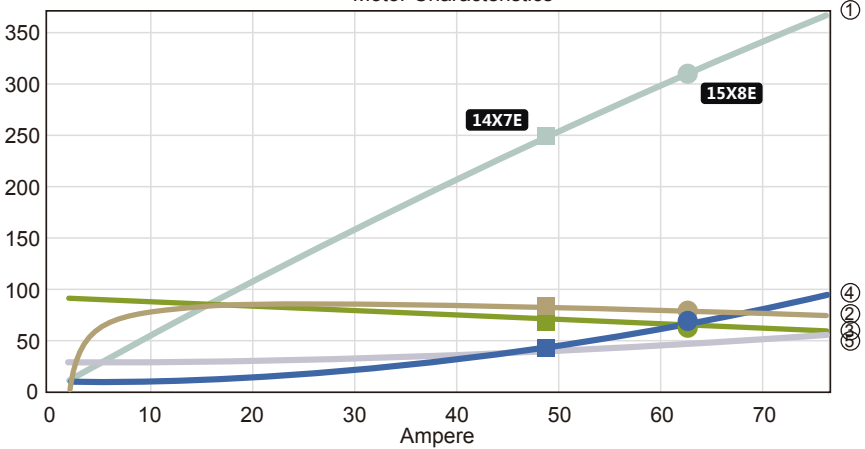

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
11.1V (3S LIPO)	14X7E							
	2500	30	2.1	11.1	23.6	77	323	13.7
	3000	36	3.6	11	39.1	80.5	465	11.9
	3500	42	5.5	11	60.6	82.4	633	10.4
	4000	49	8.2	11	89.4	83.4	827	9.3
	4500	56	11.7	10.9	126.6	83.8	1047	8.3
	5000	64	16.1	10.8	173.5	83.9	1292	7.4
	5500	71	21.7	10.7	231.3	83.7	1563	6.8
	6000	80	28.6	10.6	301.5	83.4	1861	6.2
	6500	88	37.1	10.5	385.3	83	2184	5.7
	7000	98	47.4	10.3	484.2	82.5	2532	5.2
	7101	100	50.1	10.3	509.1	82.1	2606	5.1
	15X8E							
	2000	24	1.7	11.1	18.6	75.6	291	15.7
	2500	31	3.1	11	34.5	79.5	454	13.2
	3000	37	5.3	11	58.2	81.3	654	11.2
	3500	44	8.4	11	91.7	82	890	9.7
	4000	52	12.7	10.9	136.9	82	1162	8.5
	4500	60	18.3	10.8	195.8	81.6	1471	7.5
	5000	68	25.6	10.7	270.6	81	1816	6.7
5500	78	35	10.5	363.5	80.3	2198	6	
6000	88	46.8	10.3	476.8	79.4	2615	5.5	
6500	99	61.6	10.1	613	78.5	3069	5	
6547	100	63.6	10	630.7	78.2	3114	4.9	

14.8V Motor @ Optimum Efficiency 最佳效率点

Current
31.18
A

Voltage
14.05
V

Revolutions*
10785
rpm


electric Power
437.9
W

mech. Power
380.2
W

Efficiency
86.8
%

- ① el. Power [in 5W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]


Motor Characteristics

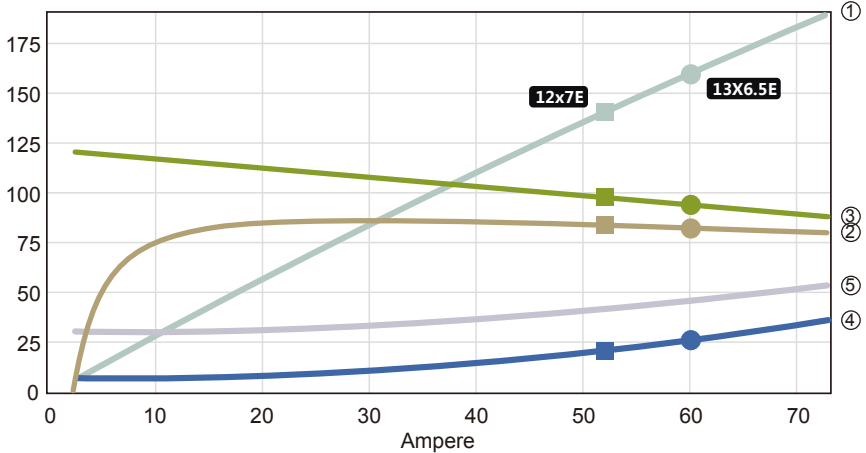

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
14.8V (4S LIPO)	12x7E							
	2800	24	1.3	14.8	19	72.8	255	13.5
	3500	30	2.3	14.7	34.2	78.8	399	11.7
	4200	37	3.9	14.7	56.6	82.2	574	10.1
	4900	44	6	14.7	87.8	84.2	781	8.9
	5600	51	8.9	14.6	129.4	85.3	1021	7.9
	6300	58	12.7	14.5	183.1	85.8	1292	7.1
	7000	65	17.5	14.4	250.5	86	1595	6.4
	7700	73	23.5	14.3	333.5	86	1930	5.8
	8400	81	31	14.1	433.9	85.8	2297	5.3
	9100	90	40.1	13.9	553.5	85.6	2695	4.9
	9800	99	51.2	13.7	694.2	85.2	3126	4.5
	9830	100	52.2	13.7	706.3	84.8	3145	4.5
	13X6.5E							
	2800	24	1.6	14.8	23.2	76	301	13
	3500	31	2.9	14.7	42.6	80.8	471	11
	4200	38	4.9	14.7	71.4	83.3	678	9.5
	4900	45	7.7	14.6	111.7	84.6	923	8.3
	5600	52	11.5	14.5	165.7	85.2	1205	7.3
	6300	59	16.4	14.4	235.6	85.3	1525	6.5
7000	67	22.8	14.3	323.8	85.1	1883	5.8	
7700	76	30.9	14.1	432.7	84.8	2278	5.3	
8400	85	41	13.9	564.7	84.4	2711	4.8	
9100	95	53.6	13.6	722.5	83.8	3182	4.4	
9428	100	61	13.5	812.9	83.2	3416	4.2	


ECO 2826C (720KV)

14.8V Motor @ Optimum Efficiency 最佳效率点



- ① el. Power [in 5W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

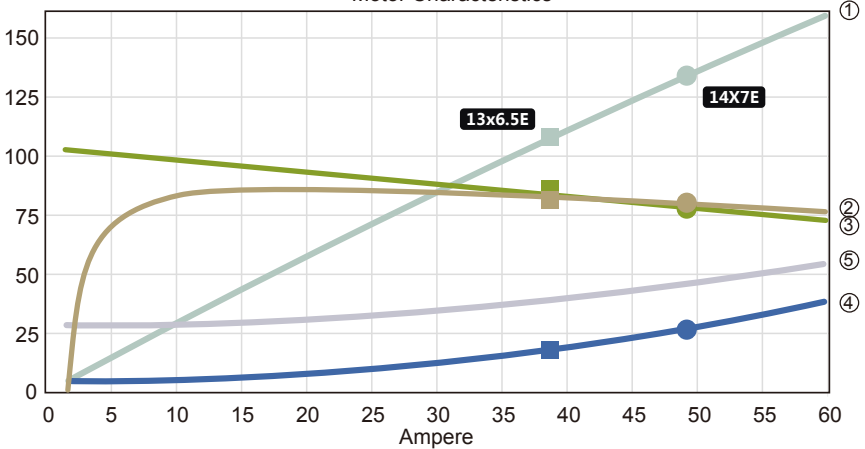

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Volage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)
14.8V (4S LIPO)	13x6.5E							
	3000	31	1.9	14.8	27.2	79.7	346	12.7
	3600	38	3.1	14.7	45.4	82.5	498	11
	4200	45	4.8	14.7	70.9	84	678	9.6
	4800	52	7.2	14.6	104.9	84.7	885	8.4
	5400	59	10.3	14.6	148.9	85	1120	7.5
	6000	67	14.2	14.5	204.4	84.9	1383	6.8
	6600	75	19.1	14.4	272.9	84.7	1674	6.1
	7200	83	25.1	14.2	356	84.3	1992	5.6
	7800	92	32.5	14.1	455.2	83.8	2338	5.1
	8279	100	39.8	13.9	550.8	83	2633	4.8
	14x7E							
	2500	26	1.6	14.8	23.1	78.9	323	14
	3000	32	2.6	14.7	38.6	81.5	465	12.1
	3500	38	4.1	14.7	60.2	82.9	633	10.5
	4000	44	6.1	14.7	89.3	83.4	827	9.3
	4500	50	8.7	14.6	127	83.5	1047	8.2
	5000	57	12.1	14.5	174.7	83.3	1292	7.4
	5500	64	16.3	14.4	233.6	82.9	1563	6.7
	6000	71	21.4	14.3	305.3	82.4	1861	6.1
6500	79	27.8	14.2	391	81.8	2184	5.6	
7000	87	35.4	14	492.4	81.1	2532	5.1	
7500	95	44.6	13.8	611	80.4	2907	4.8	
7746	100	50.1	13.7	681	79.7	3101	4.6	

18.5V Motor @ Optimum Efficiency 最佳效率点

Current
24.6
A

Voltage
17.77
V

Revolutions*
11554
rpm


electric Power
437.2
W

mech. Power
379.8
W

Efficiency
86.9
%

- ① el.Power [in 5W]
- ② Efficiency [%]
- ③ max. Revolutions [in 100rpm]
- ④ waste Power[W]
- ⑤ Motor Case Temp. [°C]

Motor Characteristics

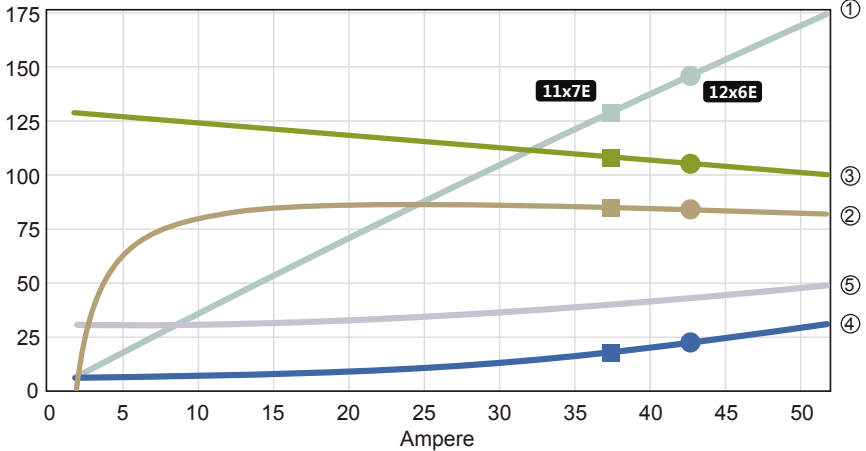

Voltage (V)	Propeller (RPM)	Throttle (%)	Current (A)	Voltage (V)	el. Power (W)	Efficiency (%)	Thrust (g)	Spec. Thrust (g/W)	
18.5V (5S LIPO)	11x7E								
	3200	26	1.1	18.5	19.4	74.8	257	13.2	
	4000	33	1.9	18.4	35.3	80.4	401	11.4	
	4800	40	3.2	18.4	58.8	83.4	578	9.8	
	5600	47	5	18.4	91.5	85.2	786	8.6	
	6400	54	7.4	18.3	135.1	86.1	1027	7.6	
	7200	62	10.5	18.2	191.3	86.6	1300	6.8	
	8000	69	14.5	18.1	262	86.7	1604	6.1	
	8800	77	19.5	18	349	86.6	1941	5.6	
	9600	86	25.6	17.8	454.1	86.4	2310	5.1	
	10400	95	33.1	17.6	579.4	86.1	2712	4.7	
	10816	100	37.9	17.5	658.4	85.5	2933	4.5	
		12x6E							
	3200	26	1.2	18.5	22.8	77.3	286	12.5	
	4000	33	2.3	18.4	42.1	81.9	446	10.6	
	4800	40	3.9	18.4	70.6	84.3	643	9.1	
	5600	47	6	18.3	110.5	85.6	875	7.9	
	6400	55	9	18.3	164	86.1	1143	7	
	7200	63	12.9	18.1	233.1	86.2	1446	6.2	
	8000	71	17.9	18	320.2	86.1	1785	5.6	
	8800	79	24.1	17.8	427.6	85.8	2160	5.1	
	9600	89	31.8	17.6	557.7	85.4	2571	4.6	
	10400	98	41.3	17.4	713.1	85	3017	4.2	
	10518	100	43.3	17.3	744.7	84.5	3086	4.1	